




## Installation Manual Double DIN Kit

Ford Fiesta 2009->  
Models with display only



Info: Hazard light switch by Ford  
(No.: 15 19 127) may be required

| Colour | Part-No.:<br>Double DIN | Part-No.:<br>with pocket |
|--------|-------------------------|--------------------------|
| black  | 381114-21-1             | 281114-21-1              |
| silver | 381114-21-2             | 281114-21-2              |


Compatible with double DIN devices

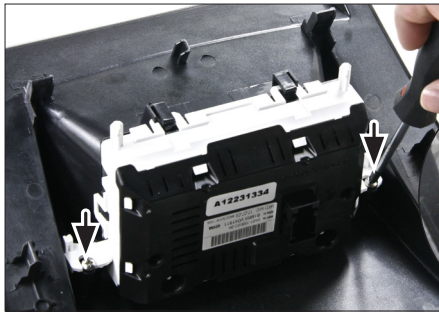

9. Fix OEM display with 2 screws

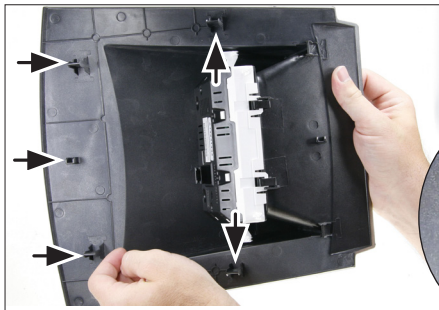

10. Remove clamps from Ford  
OEM panel. Place clamps on  
new facia plate



11. facia plate with mounted  
OEM display



12. Connect all required circuit points  
of Double-DIN Navigation, mount it  
to Double DIN facia plate, place it  
on the dashboard.  
Connect cables of OEM display  
fix facia plate with mounted OEM  
display above Double-DIN Navigation






1. Unclip the display panel



2. Remove the display panel

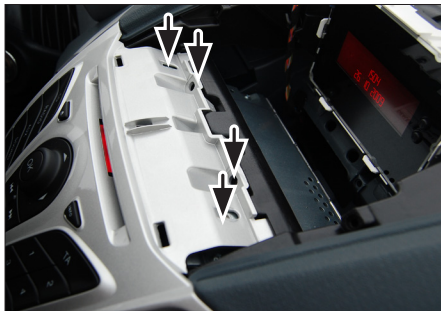

3. Remove the 4 screws of the OEM head unit




4. Remove the OEM head unit

Dismount the air vents



Mount the air vents to the new facia plate



5. Remove the middle bar  
(cut at the position marked with arrows)

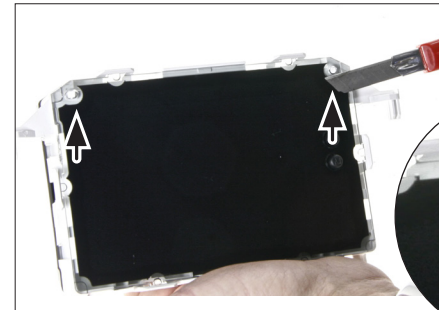


6. Remove OEM display.  
Cut away overlapping pins  
left and right

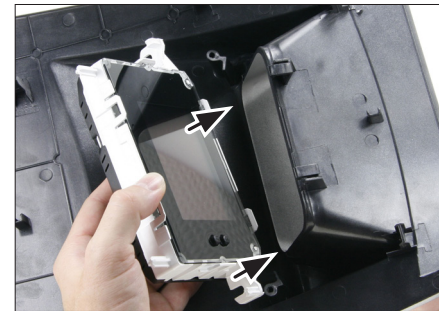

7. Mount OEM display to facia plate:

Turn facia plate upside down

Place OEM display top like shown on the picture

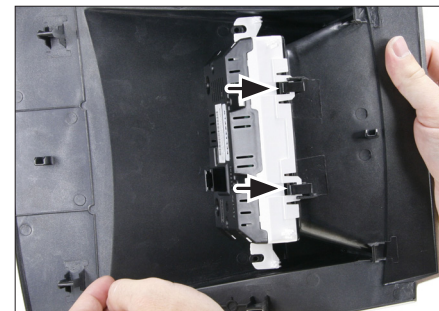

8. Push OEM display bottom until it snaps in